


**Druckluft-
Sicherheitskupplung**
Compressed Air
Safety Coupling

**SERIES
32**

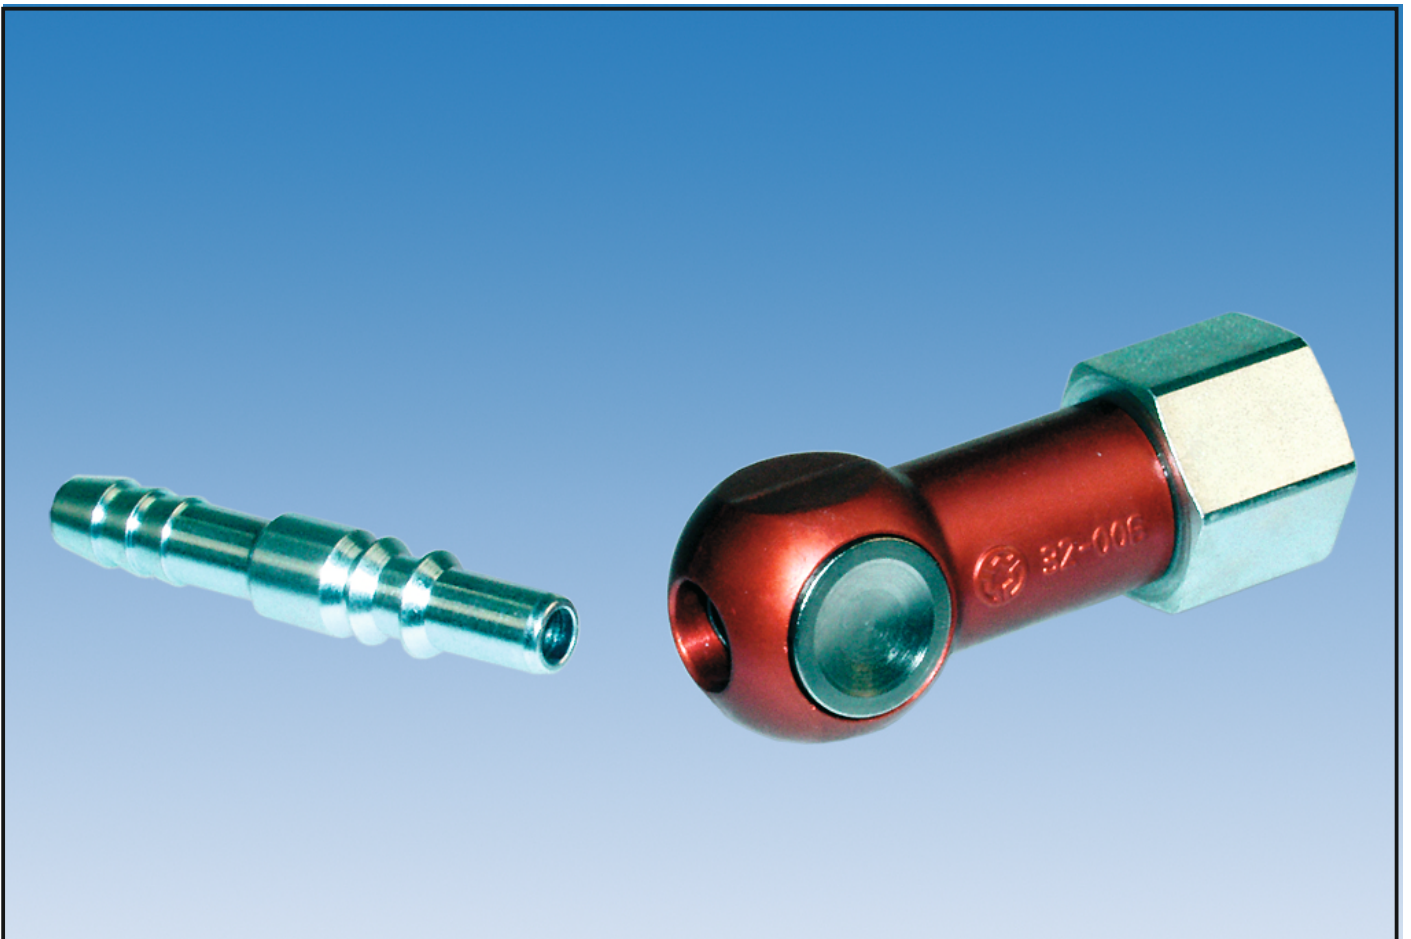

Beschreibung:

Bewährte und robuste Sicherheitskupplung mit Verriegelungs-automatik, die mit einem Druckknopf entkoppelt wird. Ein-maliges Drücken schließt das Ventil und entlüftet die Nippel-seite von anstehendem Druck. Eine zweite Betätigung des Druckknopfes gibt den Nippel frei.*

Ausführung / Technische Daten:


Kupplungsgehäuse: Aluminium rot eloxiert
 Druckknopf u. Führungsteile: Stahl vernickelt
 Anschlüsse u. Stecknippel: Stahl verzinkt
 Dichtungen: FKM
 P_{max.} zul. stat. bei 20 °C: 20 bar
 C_v-Wert Type 32-006/ DN 6: 0,82
 C_v-Wert Type 32-009/ DN 9: 2,55
 Armaturen sind frei von lackverlaufstörenden Substanzen.
 *Entspricht den Forderungen nach DIN EN ISO 4414 (vormals DIN EN 983)

Description:

Well-proven and solid safety push coupling with automatic lock, to be disconnected with a push-button. The valve is closed by pressing once the button, thus the adaptor side is ventilated and releases the pressure. A second actuation of the button unfreezes the adaptor.*

Materials / Technical data:

Coupling housing: Aluminium, red anodised
 Button and guide components: Nickel-plated steel
 Connections and thru type adaptors: Zinc-plated steel
 Seals: FKM
 P_{max.} statically admissible at 20 °C: 20 bar / 290 psi
 C_v value type 32-006, DN 6: 0,82
 C_v value type 32-009, DN 9: 2,55
 The couplings are free of enamel flow disturbing substances.
 *In compliance with DIN EN ISO 4414 (previous DIN EN 983)

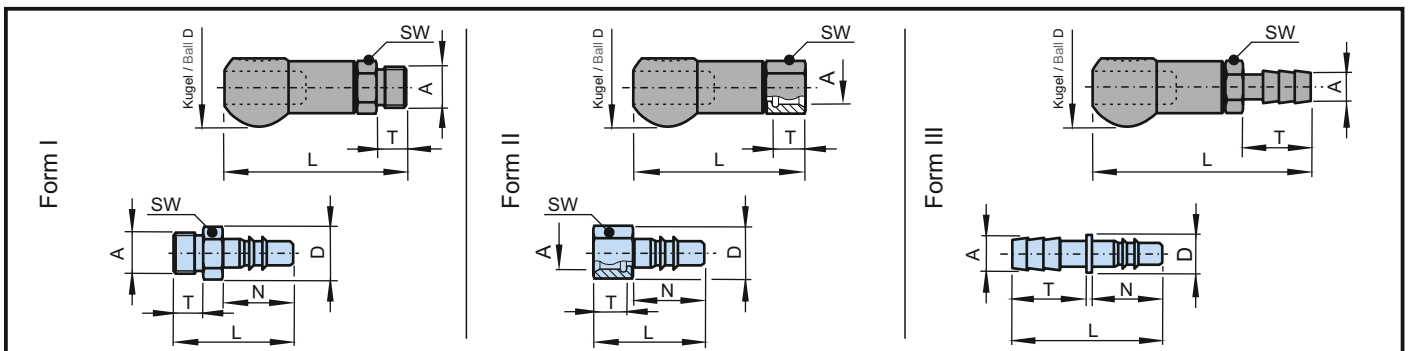

	Anschluss / Connection A	Form	D Ø [mm]	SW [mm]	L [mm]	T [mm]	N [mm]	Bestellnummer / Part number
Verschlusskupplung Self sealing coupling	G 1/4 A	I	32	19	74,5	11		32-006-0-WR013-36-2-FL
	G 3/8 A	I	32	19	75,5	12		32-006-0-WR017-36-2-FL
	G 1/2 A	I	32	22	78,5	15		32-006-0-WR021-36-2-FL
	G 1/4	II	32	19	73,5	13		32-006-0-WR513-36-2-FL
	G 3/8	II	32	22	74,5	14		32-006-0-WR517-36-2-FL
	9 mm	III	32	19	93,5	30		32-006-0-SL009-36-2-FL
Stecknippel Thru type adaptor	G 1/4 A	I	21,1	19	56,5	11	37	32-006-1-WR013-11-FL
	G 3/8 A	I	21,1	19	57,5	12	37	32-006-1-WR017-11-FL
	G 3/8	II	24,4	22	56	14	37	32-006-1-WR517-11-FL
	6 mm	III	12		62	25	37	32-006-1-SL006-11-FL
	9 mm	III	12		67	30	37	32-006-1-SL009-11-FL
	13 mm	III	16		72	30	37	32-006-1-SL013-11-FL
Verschlusskupplung Self sealing coupling	G 1/2 A	I	38	25	89,5	15		32-009-0-WR021-36-2-FL
	G 1/2	II	38	27	99,5	17		32-009-0-WR521-36-2-FL
	13 mm	III	38	25	104,5	30		32-009-0-SL013-36-2-FL
Stecknippel Thru type adaptor	G 1/2	II	30,1	27	63	17	42	32-009-1-WR521-11-FL
	13 mm	III	20		77	30	42	32-009-1-SL013-11-FL

© WALTHER-PRÄZISION • Änderungen und Irrtümer vorbehalten / Subject to modifications, errors excepted • 1089 / X / 0

WALTHER-PRÄZISION

Schnellkupplungssysteme / Quick Coupling Systems

Carl Kurt Walther GmbH & Co. KG

Hausadresse / Head office:
 Westfalenstrasse 2
 42781 Haan, Germany

Postadresse / Postal address:
 PF / P.O. Box 420444
 42404 Haan, Germany

T +49 (0) 21 29 / 567-0
 F +49 (0) 21 29 / 567-450

W www.walther-praezision.de
 E info@walther-praezision.de

